


ELECTRIC OIL DRUM PUMP DEP-1403-20V

Specification

- Power source: DC 20V
 - Delivery volume
 - Motor oil: Approx. 16LPM (20°C, 5W30) / 4.2GPM (68°F, 5W30)
 - Water: Approx. 27LPM (7.1GPM)
 - Applicable liquids: Motor oil, Hydraulic oil, Lubricants, Diesel, DEF(AdBlue), Water, Kerosene, Antifreeze, Windshield washer fluid, Mild detergents, Agricultural chemicals, Light oils (Max. 100cst)
- ✓ Note: Use higher than 10°C (50°F) for Motor oil, Hydraulic oil, Lubricants, Light oils (Max. 100cst)

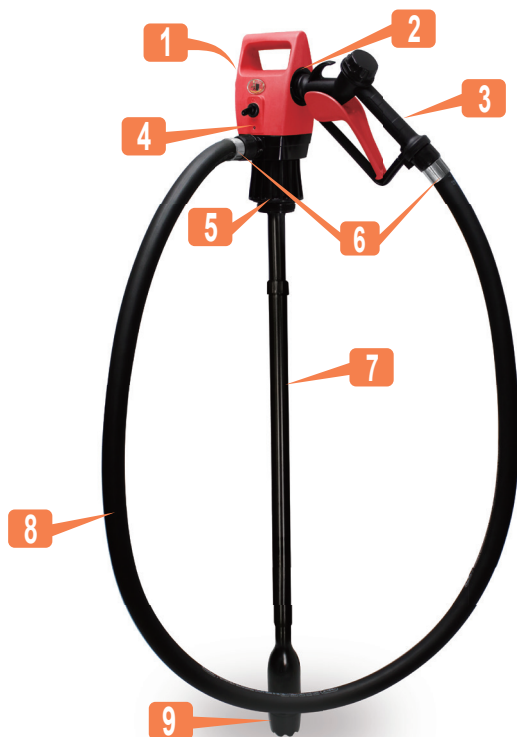

4. LED light for operating signal



POWER OFF



POWER ON

5. Drum bung adapter

- Improved grip of drum bung adapter
 - 60mm (2.4") wide grip makes it easy to tighten up and loosen
- Length is adjustable by 15mm (0.6") according to height of drum



- ※ 2" NPT to 2" buttress adapter (2.5x5)
- Optional part



buttress adapter





6. Swivel connection

- Great for removing twists



7. Suction pipe

- Standard type
 - Suction tube: 850 ~ 865mm (33.5"~ 34")
 - Applicable on 55 gallon drum
- Telescopic type
 - Suction tube: 850 ~ 1245mm (33.5"~ 49")
 - Applicable on 55 gallon drum and IBC Totes



- Suction end Outer Dia. : 55mm(2.17")



8. Hose

- 4 layers with oil & flame resistant, cold weather resistant
- High grade polyester yarn reinforcement with flexible construction



9. End cap filter

- Filter-equipped intake end protects the motor from damage due to alien matters



1. Power supply unit

AC/DC Adapter

DC20V AC/DC adapter • AC 100 ~ 240V 50/60Hz

- The power cord to be plugged into an AC outlet
- AC cable : Approx. 1m (3.3ft)
- DC cable : Approx. 4m (13ft)



Rechargeable Battery

- Fully charged battery can discharge about 400 liters (106 gallons) - based on water
- Includes battery charger
- Approx. one hour to charge battery



✓ Option : DC Cable + Clips

Delivery volume

- Motor oil: Approx. 10LPM (20°C, 5W30) / 2.6GPM (68°F, 5W30)

- Water: Approx. 22LPM (5.8GPM)



※ Use DC20V or lower
※ Do not use DC 24V from commercial vehicle battery

2. A handy nozzle holster built in



3. Two types of nozzle

- Plastic spout nozzle

- Stainless steel spout nozzle



Plastic spout - OD 25mm(1")



Stainless spout - OD 18mm(3/4")